Model YES Servo motor driven sealer

Top sealer for white bread bags





1. Perfect sealing is achievable

Optimal setting can be made based on the size of the bag.

2. Space-saving

The length of machine has been shortened to reduce the space.

3. Quiet driving sound


Quiet operation with servo motor and timing belt.





Servo motor driven sealer

Model YCS

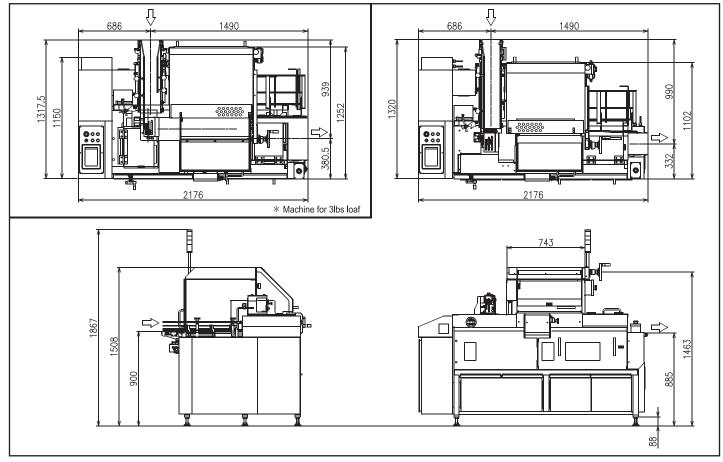

Specifications

Note) Specifications and dimensions are subject to change without prior notice. Note) Transformer might be needed depending upon the specifications.

Servo motor driven sealer <ycs></ycs>		
Model	YCS	YCS (Machine for 3lbs loaf)
Basic specifications	1/2lbs loaf: 61 bags/min	1/2lbs: 51 bags/min 1lbs: 51 bags/min
(*1)	1lbs loaf : 56 bags/min	3lbs: 41 bags/min
Maximum capacity	1/2lbs : 70 bags/min	1/2lbs: 60 bags/min 1lbs: 60 bags/min
(*2)	1lbs : 60 bags/min	3lbs: 45 bags/min
Power source	AC200V 3Phases	
Electric capacity	Approx. 5kW	
Air Consumption	700 NL/min	
Applicable products	1/2lbs/1lbs loaf (sliced)	1/2lbs/1lbs loaf (sliced)
		3lbs loaf (non-sliced)
Sealing type	Heating seal (thermal press bond type)	
Applicable packaging material	Polypropylene, polyethylene (*3)	
Dimensions	Approx. W 2,180 mm × L 1,320 mm × H 1,510 mm (signal tower excluded)	
Machine weight	Approx. 800 kg	Approx. 850 kg

- *1: Operating beyond the basic capacity may result in decline in quality stability.
- *2: This is the maximum capacity of the machine itself. It may vary depending on conditions of use.
- *3: It may not be compatible depending on specifications and thickness. Please contact us for more information.

OSHIKIRI MACHINERY LTD.

https://www.oshikiri.com/

4, Kirihara-cho, Fujisawa-shi, Kanagawa, 252-0811 Japan Phone: 0466-44-6184 Fax: 0466-44-6187 E-mail: intl@oshikiri.com

Oshikiri Corporation of America

10425 Drummond Road, Philadelphia, Pennsylvania 19154-3898

Phone: 215-637-6005 Fax: 215-637-6041 E-mail: oshikiri-production@msn.com



OSHIKIRI Website