

# Depositor Model DPD

**Automatically and precisely scales set amount of filling.**



The model shown is with optional items of:

- drawer type
- stainless steel frame
- see-through cover
- operation panel cover
- Auxiliary operation panel



◎ Available for any kind of filling material with Piston-Valve method.  
Does not knead material too much so as not to damage it.


◎ No product loss as it detects dough and deposits filling row by row.

◎ Vertical and horizontal position and amount of depositing of all rows are adjusted at a time by one handle operation.

**Various optional items are available in accordance with your system requirement.**


# Depositor

# Model DPD

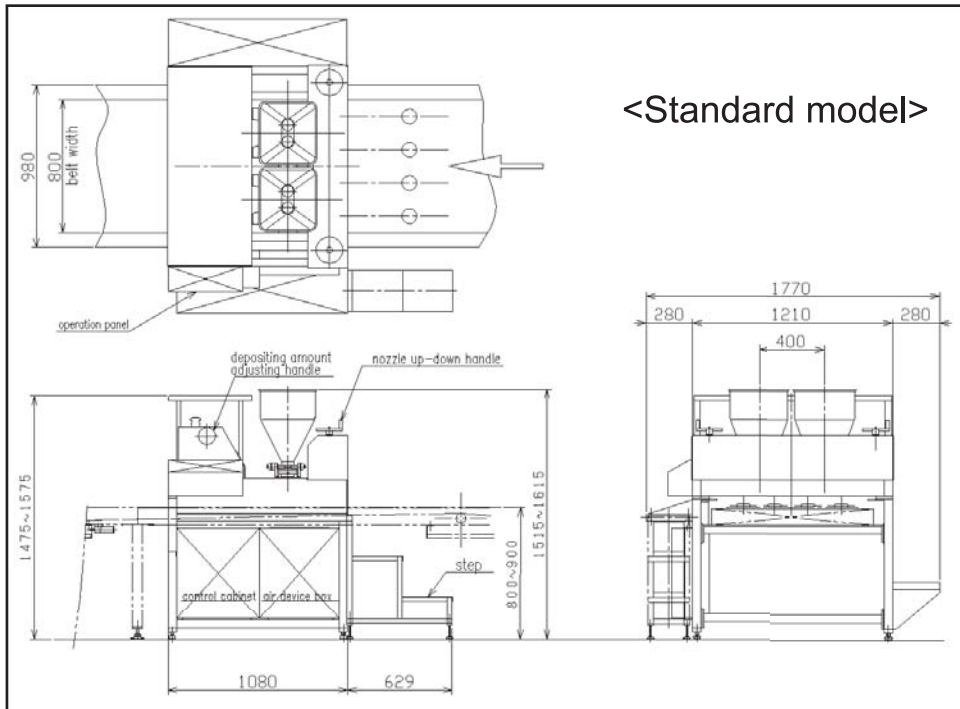

## ■ Standard model (fixed type)

Capacity: 8000 pcs/h  
 Depositing amount: 20 - 75g (specific gravity 1.25)  
 Hopper capacity: 35L × 2 hoppers  
 Air consumption: 750L(Normal)/min  
 Elect. capacity: 3.5KVA (max.)  
 AC200V 3ph  
 Machine weight: 500kg (main body)

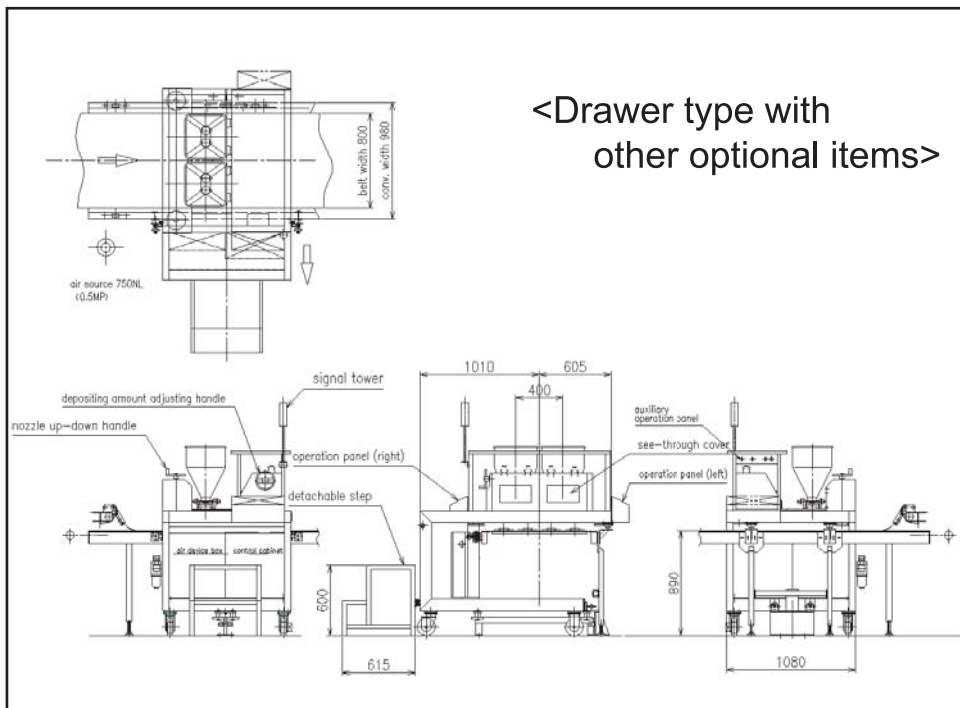

## ■ Optional items

- Drawer type
- Valve case made from titanium
- See-through cover
- Proximity switches on hopper
- Operation panel cover
- By-pass stage above conveyor
- Detachable steps for drawer type
- Air tank
- Auxiliary operation panel

Note) Specifications and dimensions may be subject to change without prior notice.  
 Note) Supply voltage is in accordance with the one in the country machine is used.  
 Transformer might be needed according to the specifications.

## OSHIKIRI MACHINERY LTD.

<https://www.oshikiri.com/>

4, Kiriara-cho, Fujisawa-shi, Kanagawa, 252-0811 Japan  
 Phone: 0466-44-6184 Fax: 0466-44-6187 E-mail: intl@oshikiri.com

Oshikiri Corporation of America  
 10425 Drummond Road, Philadelphia, Pennsylvania 19154-3898  
 Phone: 215-637-6005 Fax: 215-637-6041 E-mail: oshikiri-production@msn.com  
 19.07.12 OSHIKIRI P-068-5