Model RSA

Reverse Sheeter

Easy-to-attach/detach scraper and easy cleaning
The belt with the surface layer made of urethane resin is used.
No meandering and hygienic

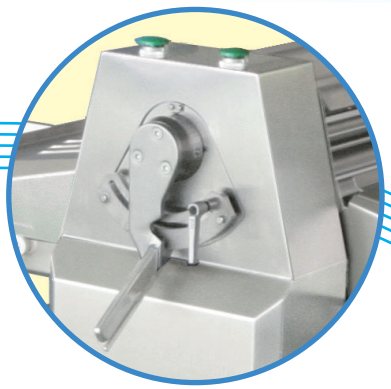

Light handle operation is achieved.

Can be folded up into a compact size!
Easy to move with casters.

OSHIKIRI

Reverse Sheeter Model RSA

■Dimensional Drawing

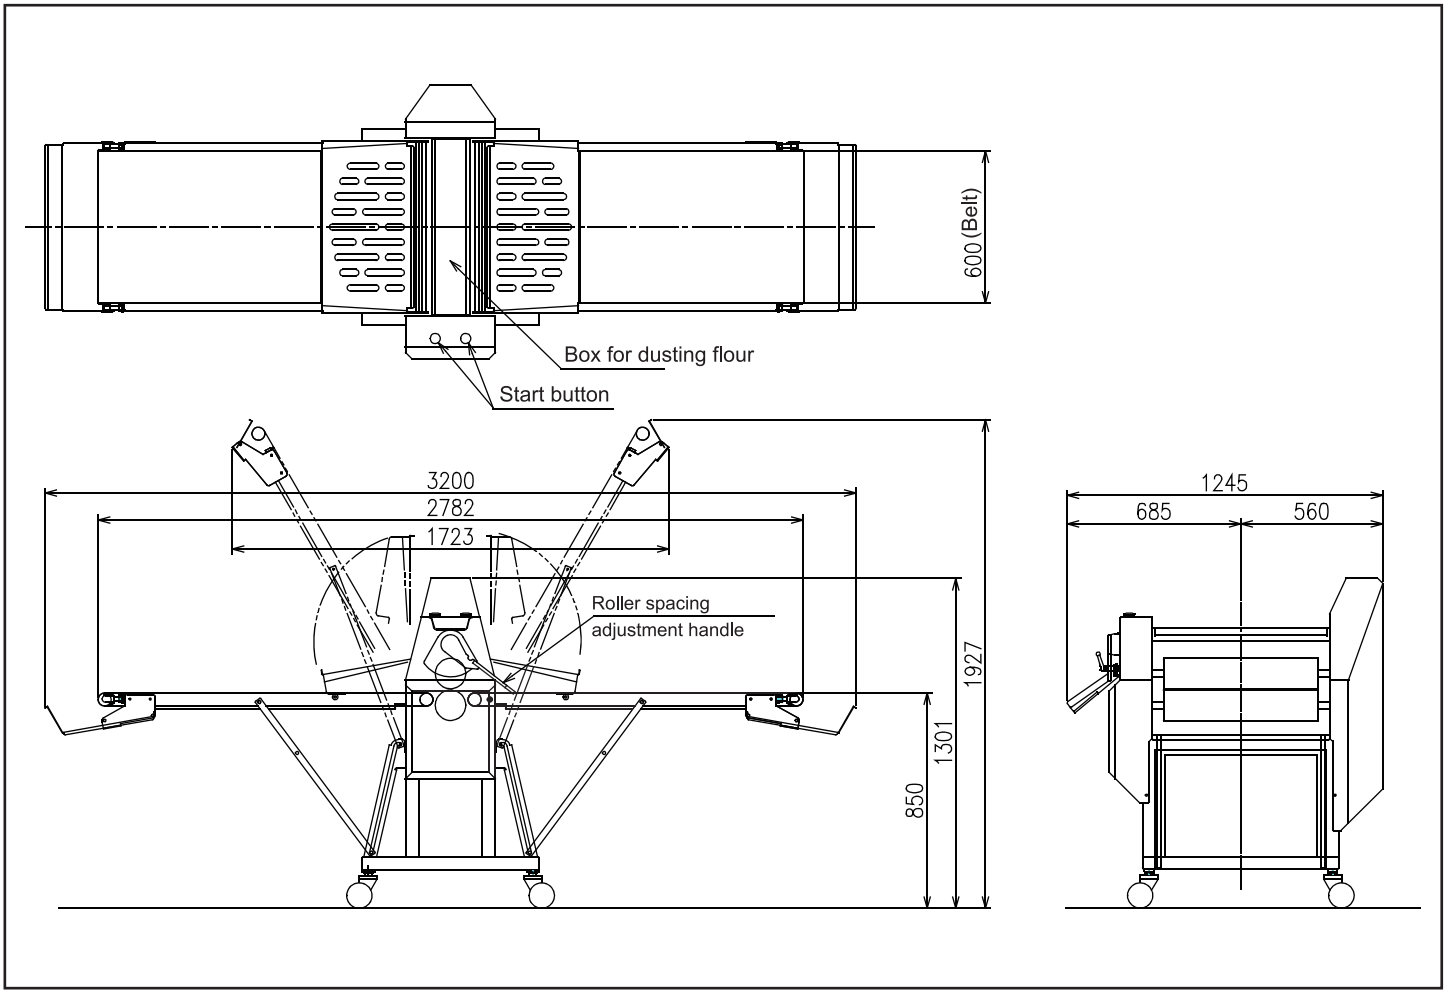

■Specifications

Reverse Sheeter Model RSA		
Range of roller clearance	1.5～45mm	Manual
Roller speed	36m/min	
Power Source	AC200V 3Phases	
Capacitance	Sheeter roller	0.4kW×2
	Belt conveyor	0.2kW×2
	Total	1.2kW

Note) Specifications and dimensions are subject to change without prior notice.
Note) Transformer might be needed depending upon the specifications.

OSHIKIRI MACHINERY LTD. https://www.oshikiri.com/

4, Kirihara-cho, Fujisawa-shi, Kanagawa, 252-0811 Japan
Phone: 0466-44-6184 Fax: 0466-44-6187 E-mail: intl@oshikiri.com

Oshikiri Corporation of America
10425 Drummond Road, Philadelphia, Pennsylvania 19154-3898
Phone: 215-637-6005 Fax: 215-637-6041 E-mail: sales_oca@oshikiri.com

OSHIKIRI Website