"WIDE FINE" Moulder

Model WFS

Easier operation, cleaning & maintenance!!!

- Variable speed change by inverter for belt speed (geared with roller).
- Design for higher sanitation and easier maintenance enable easy replacement of the belt.
- Sanitary stainless cover

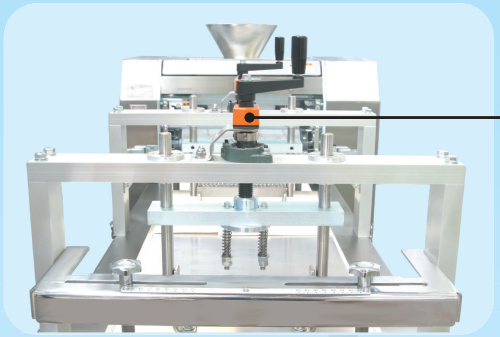

"Return Gap" mechanism for pressure board.
Pressure board height
is indicated with figure for easier setting.

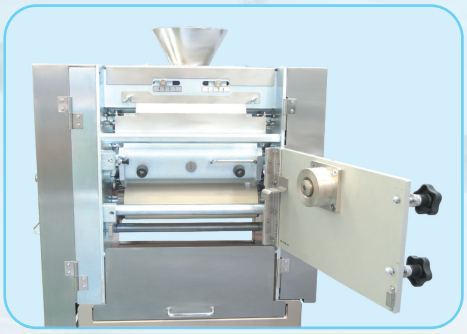

Rear cover is fully opened for easier maintenance. Equipped with a pulling-out type catch pan underneath.

OSHIKIRI

"WIDE FINE" Moulder Model WFS

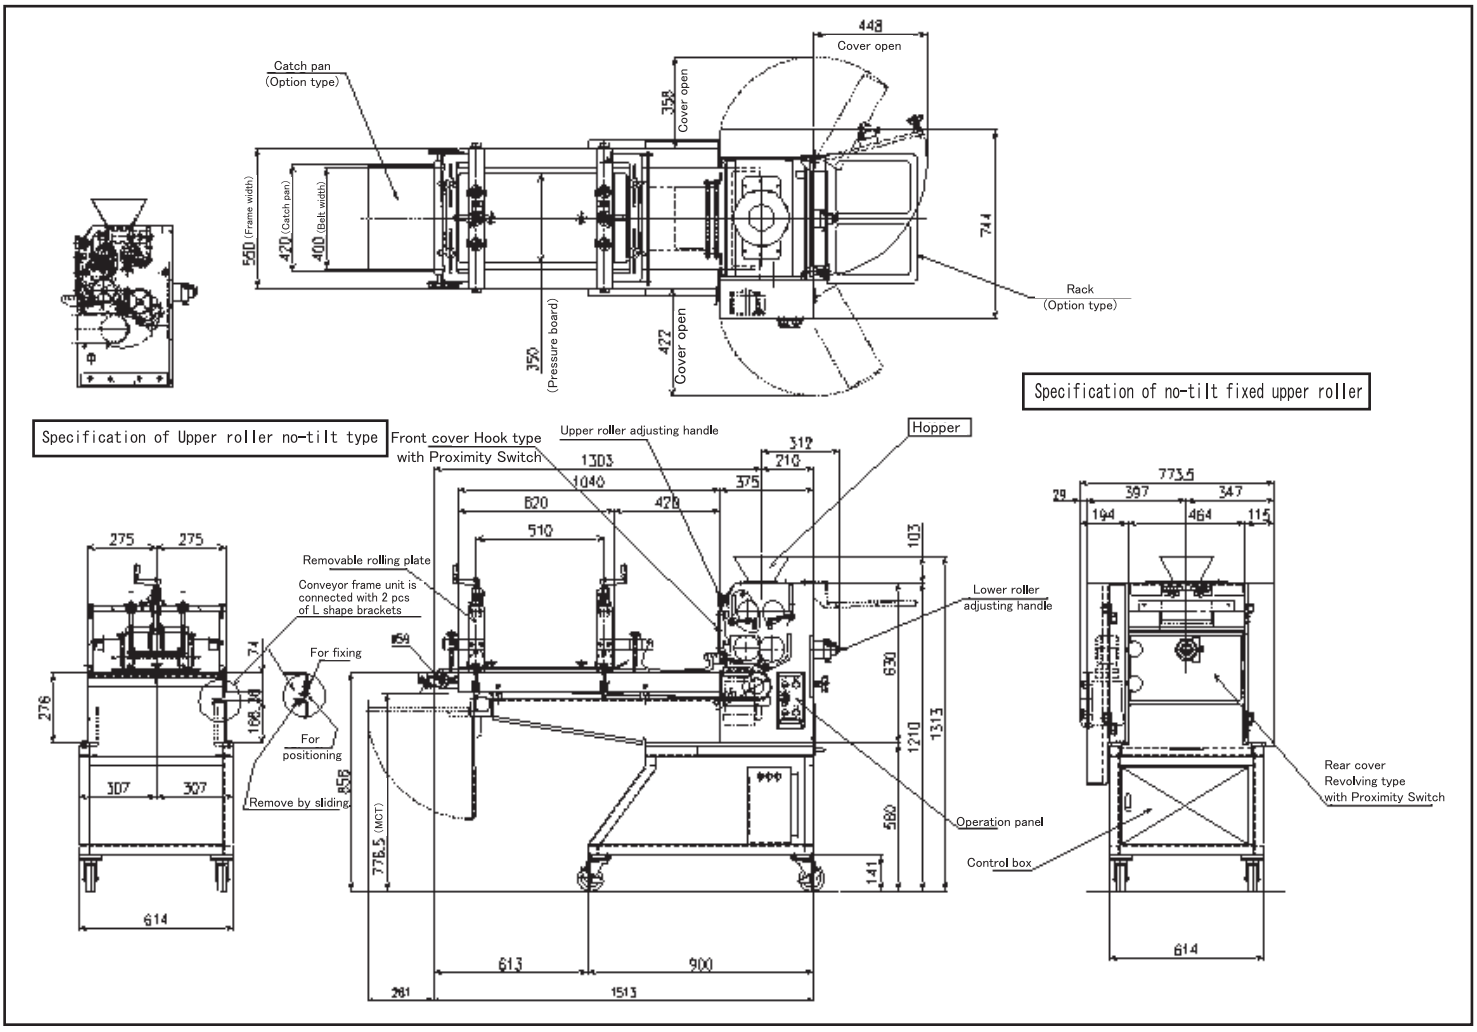

■Specifications

Capacity	3,000pcs/h in case of 230g
	4,500pcs/h in case of 30g
Dough weight	30～230g
Roller Diameter	Upper φ85(Polyacetal)
	Bottom φ100(Teflon)
Roller clearance	Upper 9 - 14 Lower 1 - 9mm
Roller speed	27.5～55m/min
Pressure board size	W 350 X L 680mm
Pressure board height adjustment range	10～50mm
Width plate adjusting range	100～330mm
Motor	For Main drive motor (Standard) 4P 0.4kW
Machine weight	Approx. 350kg

■Optional items

- SUS made base flame / control box
- Pressure board also available for roll product
- Detachable bottom plate of pressure board
- Container rack at infeed
- Discharge receiving pan
- Discharge chute
- Digital indication of roller clearance

Note) Specifications and dimensions are subject to change without prior notice.
Note) Transformer might be needed depending upon the specifications.

OSHIKIRI MACHINERY LTD. https://www.oshikiri.com/

4, Kirihara-cho, Fujisawa-shi, Kanagawa, 252-0811 Japan
Phone: 0466-44-6184 Fax: 0466-44-6187 E-mail: intl@oshikiri.com

Oshikiri Corporation of America
10425 Drummond Road, Philadelphia, Pennsylvania 19154-3898
Phone: 215-637-6005 Fax: 215-637-6041 E-mail: sales_oca@oshikiri.com

OSHIKIRI Website

25.03.24 OSHIKIRI P-096-8