Turning device with Automatic Separator

Model YLH Loaf Separator

for one loaf and half loaf

No chain, no air in the section of turning device for half loaf High speed and reliable automatic supply










- OIntroduce the timing belt to transverse unit instead of chain and dissolve the problem for out of position when feeding.
- © Easier maintenance and cleaning by introducing timing belt in the section of turning device.
- **OAchieve keeping stable feeding for Pullman bread as well as English bread.**



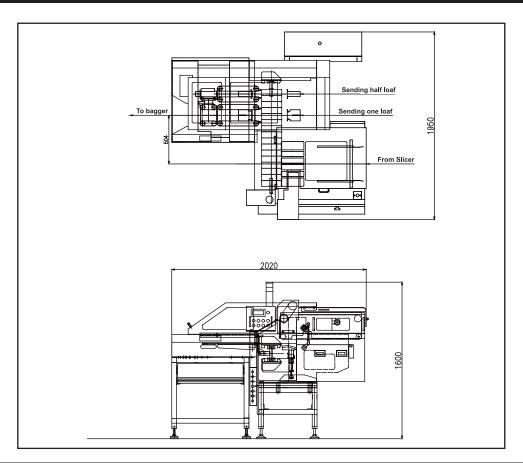

Loaf Separator for one loaf and half loaf <ylh></ylh>		
Capacity	Loaf 60pcs/min Max	Harf loaf 70pcs/min Max
Feeding method	Normal feeding	Feeding after 90 degrees turning
Power source	AC200V 3phases	
	3.0kW	
Air Consumption (Primary side)	65L/min 0.5Mpa	
Machine weight	Approx. 800kg	
Machine size	Approx. 2020mm × 1600mm × 1950mm	

Note) Specifications and dimensions may be subject to change without prior notice.

Note) Supply voltage is in accordance with the one in the country machine is used. Transformer might be needed according to the specifications.

OSHIKIRI MACHINERY LTD.

https://www.oshikiri.com/

4, Kirihara-cho, Fujisawa-shi, Kanagawa, 252-0811 Japan Phone: 0466-44-6184 Fax: 0466-44-6187 E-mail: intl@oshikiri.com

Oshikiri Corporation of America